

PROJECT:

FOR APPROVAL




CERTIFIED

DUROVAC MODEL PLCV75XF PORTABLE VACUUM SYSTEM

STANDARD FEATURES:

1. 1450 ICFM @ 15" Hg. CONTINUOUS
2. TUTHILL 6024 VACUUM PRODUCER
3. 75 HP DIRECT DRIVEN MOTOR
4. 330 SF CARTRIDGE FILTERS, POLYESTER FELT
5. 99.9% @ 2 MICRONS, STANDARD
6. AUTOMATIC PULSE JET CLEANING
7. 2.50 CY (60 CF) USABLE MATERIAL STORAGE
8. ABRASION RESISTANT INLET PRE-SEPARATOR
9. CUSTOM TUNED SILENCER, 88 DBA @ 3 FT!

WEIGHT 5660 LBS EMPTY

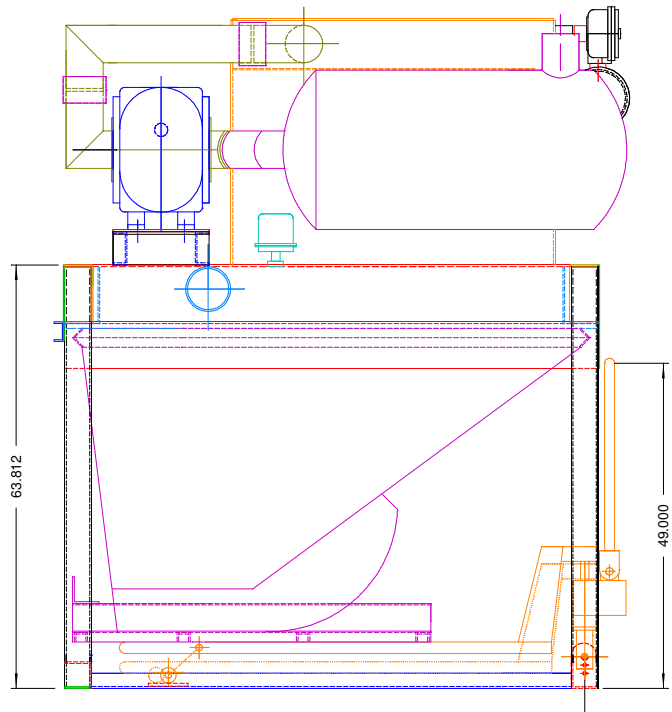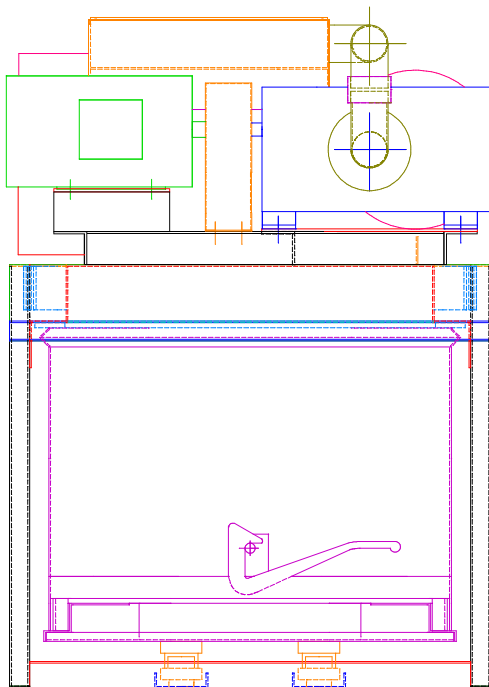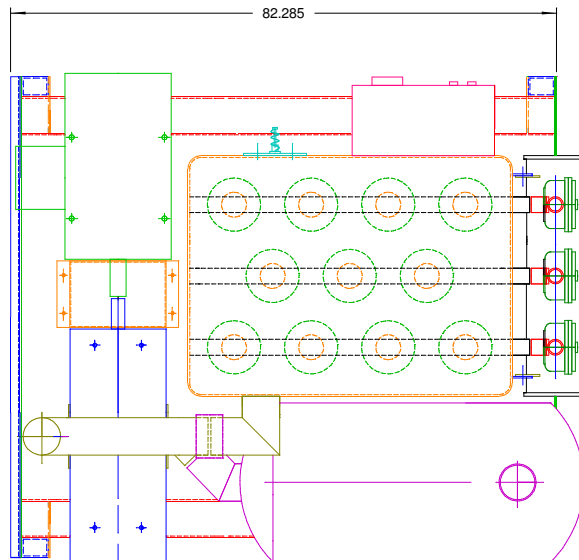

1. SUITABLE FOR WET AND DRY PICKUP
2. EXPECT 500 LBS/MIN PICKUP WITH 5" HOSE 25 FT LONG
3. WILL SUPPORT A FIXED PIPE NETWORK UP TO 400 FT LONG WITHOUT MODIFICATION
4. PAINTED PRIME BASE COAT AND TWO TOP COATS OF ENAMEL

DUROVAC INDUSTRIAL VACUUMS
BRAMPTON, ON 888-330-3365

00	12 JAN 09	ISSUED FOR REVIEW
Rev.	Date	

DATE:	
DRAWN BY:	KRW
SCALE:	NTS

DRAWING No.	Rev.
090112 - D01	00
PAGE 1 OF 1	